

SPACE™ Trailers specifications and stuff to know

SPACE™

SPACETRAILERS.COM

TRAILERS



SPACEtrailers.com

612.239.3216

Page 1 of 3

SPECIFICATIONS

- » Weight 550 lbs - 625 lbs depending on options
- » 1000 lbs load capacity
- » 1650lbs total load capacity including trailer
- » 225lbs load capacity on SPACE Bars

Dimensions

- » Box with canopy dimensions – 84”L x 49”W x 28”H
- » Box height w/out canopy 13”

Overall measurements

- » 6500 Standard tongue 11’L x 69”W x 49”H – Haul up to a 10ft Kayak or SUP
- » 6500 Longneck tongue 12.5’L x 69”W x 49”H – Haul up to a 15ft Kayak
- » 6500 Longneck XL 13.5’L x 69”W x 49”H – Haul up to 18ft Kayak

Above measurements are for the Lowrider. Add 3” for Highrider 6” for Highrider with 15” wheels



Page 2 of 3

COMPONENTS

- » 18 Gauge galvanized powder coated box
- » 14 Gauge hot dipped galvanized steel frame with five cross members
- » Aluminum rivets and stainless steel fasteners
- » 1650LB Leaf spring axle with sure lube hubs
- » .5" Marine plywood coated on both sides with exterior paint
- » LED lights and worry free custom made wiring harness
- » 2" ball and four flat connection
- » Tires – Standard 13" High speed tires
- » UV Protectant .25" thick HDPE plastic canopy with Aluminum frame




Tongue height, hitch height & ball mounts

Tongue height is from the ground to the bottom of the coupler


- » Lowrider with 13" wheels tongue height 15"
- » Highrider with 13" wheels tongue height 18"
- » Lowrider with 15" wheels tongue height 18"
- » Highrider with 15" wheels tongue height 21"



How to calculate the drop or the rise of the desired ball mount that slides into the hitch

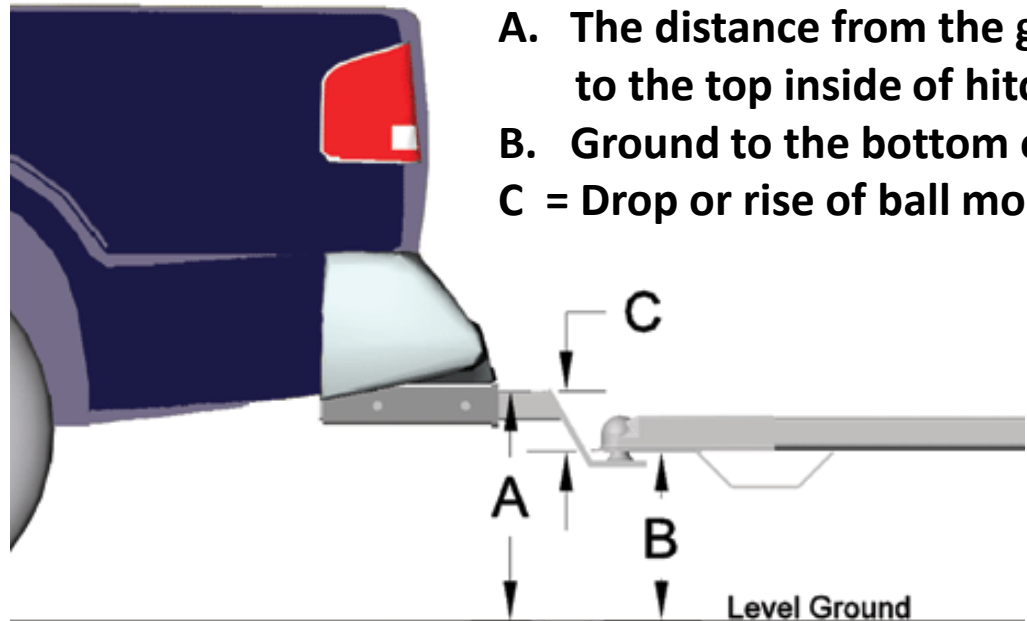

- A. The distance from the ground to the top inside of hitch tube
- B. Ground to the bottom of coupler
- C = Drop or rise of ball mount (A-B = C)

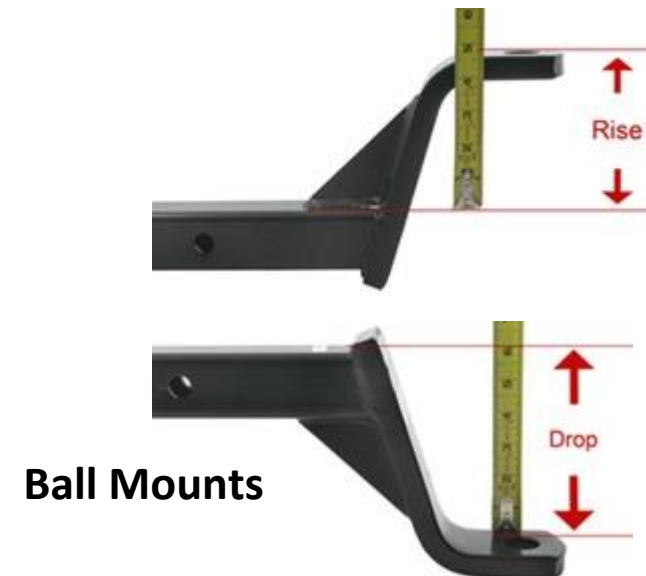

Ball Mounts